



Heatshrink - Low Smoke Zero Halogen

Thermal Cable Labels



The zero-halogen heatshrink tubing is flexible, flame-retardant and has a low smoke index. It is suitable for use in railway as it meets the LUL: London Underground Limited Eng. Stand. 1-085 A1 Standard. Supplied on rolls you can select the length of marker required with our Silver Fox Labacus Innovator **Advanced** or **Professional** software. Print in conjunction with our Plug'N'Play thermal printer with the same ribbon as all our other thermal labels.

✓ **Approved by London Underground.**

TIP Get the most from your heatshrink by printing only the length of label you require. You can even produce idents for both ends of a wire at the same time using the unique cross ferrule functionality from our **Professional** software and our Plug'N'Play thermal printer.

Benefits

- Easy to use and apply
- Use with a standard heat gun
- Print 2 rolls at a time
- Choice of 6 sizes

Technical Data

RoHS compliant

Material	Halogen free flame retardant polyolefin
Shrink ratio	2:1
Operating temp.	-40°C to 105°C (-40°F to 221°F)
Printer type	Silver Fox DTP-1 thermal printer



[View product demo](#)




[View software demo](#)

Thermal Printer





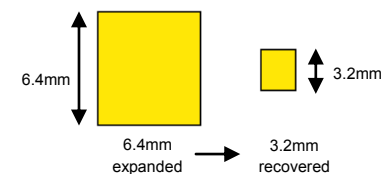


Example LHZ2-6-4(18)T



Drawing not to scale

Order Information

Product Code	Cable ID Ø expanded (mm)	Cable ID Ø recovered (mm)	Roll Length (m)	Pack Qty	Total Pack Length (m)	Colour Options
LHZ2-2-1(22)T	2.4	1.2	22	6 Rolls	132	
LHZ2-3-1(22)T	3.2	1.6	22	6 Rolls	132	
LHZ2-4-2(18)T	4.8	2.4	18	5 Rolls	90	
LHZ2-6-3(18)T	6.4	3.2	18	4 Rolls	72	
LHZ2-9-4(18)T	9.5	4.8	18	3 Rolls	54	
LHZ2-12-6(18)T	12.7	6.4	18	3 Rolls	54	